


**HULK® SERIES KDL-SM DOCK LIFT - SURFACE MOUNTED**  
**L I F T P R O D U C T S S P E C I F I C A T I O N S**



**Design Highlights**

- High Tensile Strength, Structural Tubing Construction for Maximum Stability
- Velocity Fuses on Lift Cylinders Prevent Lift from Free Falling in the Event of Hydraulic Failure
- Pre-wired NEMA-4X Push Button Control Panel
- Versatile, Split Entry Plates with Lifting Chains and Entry Ramp
- Removable, Mandrel Formed Tubing Handrails
- Maintenance Strut
- Removable Lifting Lugs
- Meets ANSI MH29.1 Safety Requirements for Industrial Scissor Lifts
- Upper Travel Limit Switch
- Oil Sight Gauge in Hydraulic Reservoir
- Self-lubricating Bushings
- Standard 25' Hydraulic Hose
- Low Temperature Oil
- Two-year Parts, One-year Labor Limited Warranty
- UL Approved Panel

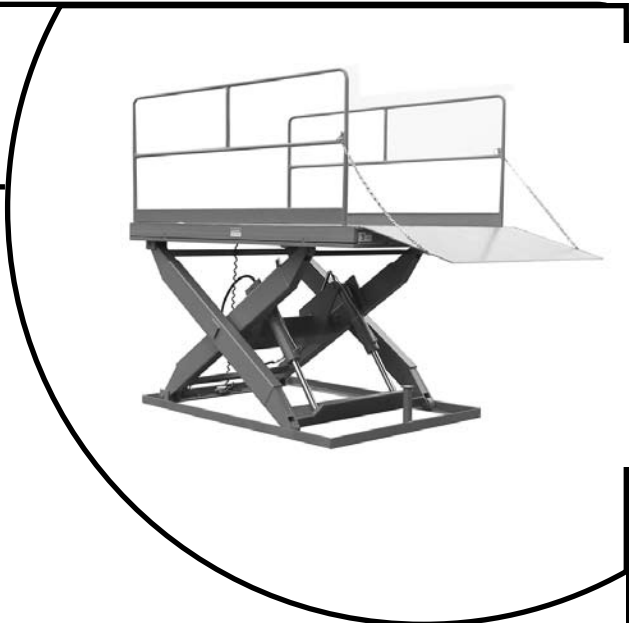

**Available Options**

- Portability
- Electric Toe Guards
- Aluminum Bridge Plates
- Post Office Option Package
- Hot Dipped Galvanized
- Spring-assisted Bridge
- In-motion Warning Beeper and Flashing Light
- Roller Curtains
- Accordion Bellow Skirting
- Mechanical Pop-up Stop
- Biodegradable Oil
- Special Sizes
- Other \_\_\_\_\_

**Project Information**

Job Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 General Contractor \_\_\_\_\_  
 Distributor \_\_\_\_\_  
 Model \_\_\_\_\_ Quantity \_\_\_\_\_ Voltage/Phase \_\_\_\_\_

# HULK® SERIES KDL-SM DOCK LIFT - SURFACE MOUNTED

## L I F T P R O D U C T S S P E C I F I C A T I O N S



Model No.	Travel [in]	Capacity [lb]	Standard Platform [in]	Max. End Load [lb]	Max. Side Load [lb]	Lowered Height [in]	HP	Raise Lower Speed [fpm]	Ship Weight [lb]
KDL47-4SM	52	4,000	48 x 84	2,400	2,000	7	3	15	2,150
KDL47-5SM	52	5,000	48 x 84	3,000	2,500	7	3	10	2,300
KDL47-6SM	52	6,000	48 x 84	3,600	3,000	7	3	10	2,400
KDL57-4SM	52	4,000	60 x 84	2,400	2,000	7	3	15	2,250
KDL57-5SM	52	5,000	60 x 84	3,000	2,500	7	3	10	2,400
KDL57-6SM	52	6,000	60 x 84	3,600	3,000	7	3	10	2,500
KDL67-4SM	52	4,000	72 x 84	2,400	2,000	7	3	15	2,600
KDL68-5SM	52	5,000	72 x 96	2,500	2,500	7	3	9.5	2,600
KDL68-8SM	52	8,000	72 x 96	6,400	4,000	8	3	8	3,200